

FIG. 1 is a perspective view of a device 10 in accordance with the present invention. The device 10 includes a main body 12 having a plurality of openings 14. The main body 12 is connected to a base 18 by a plurality of fasteners 15. The base 18 is connected to a support 20 by a plurality of fasteners 16. The device 10 is shown in a perspective view.



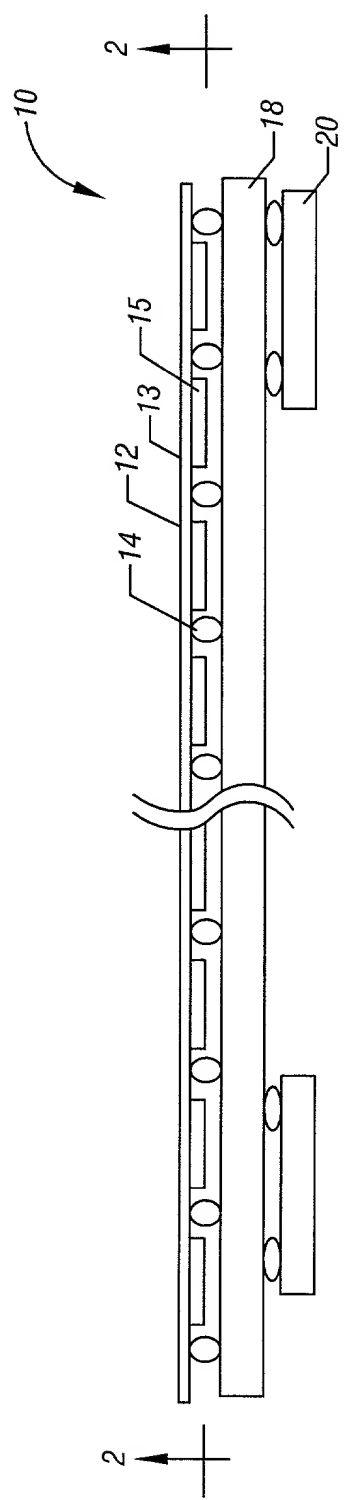



FIG. 1

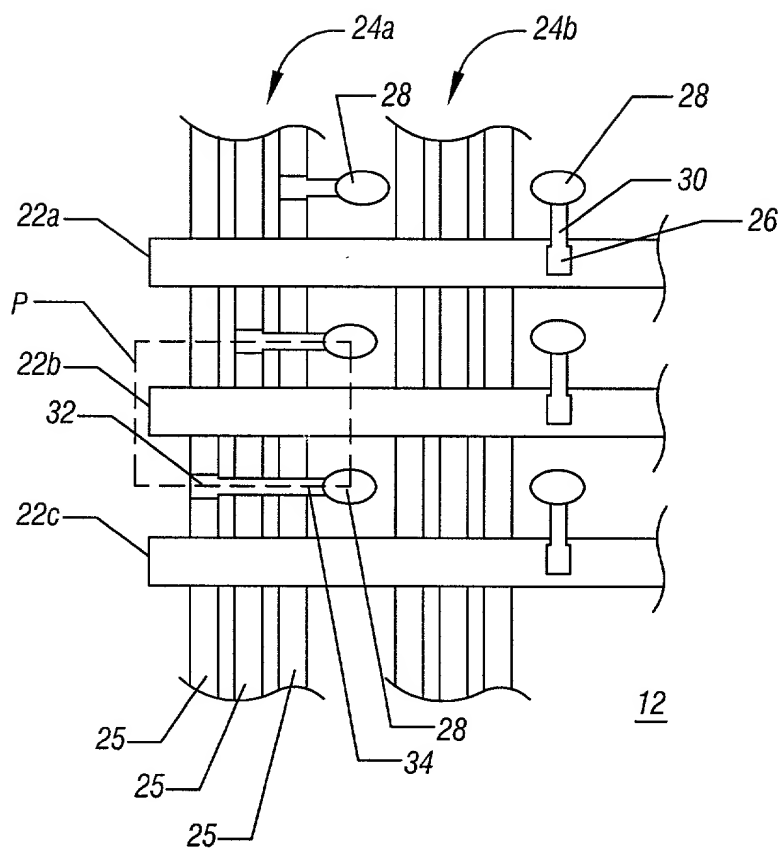

**FIG. 2**

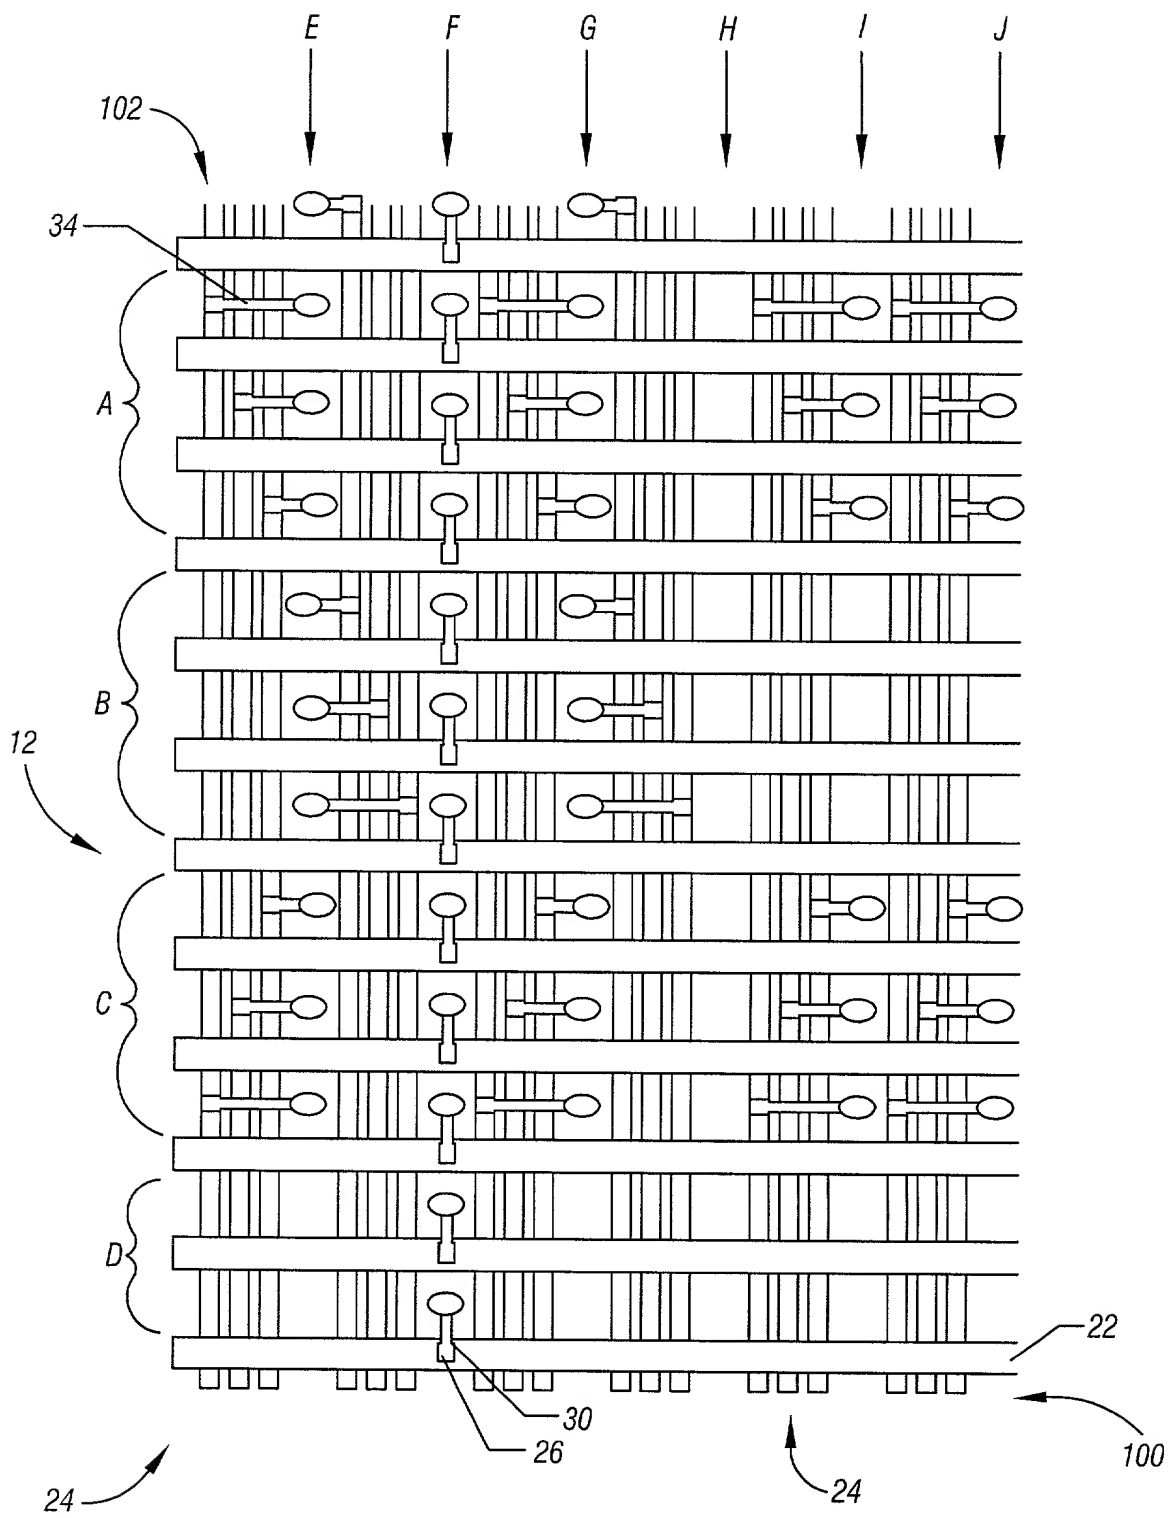

**FIG. 3**

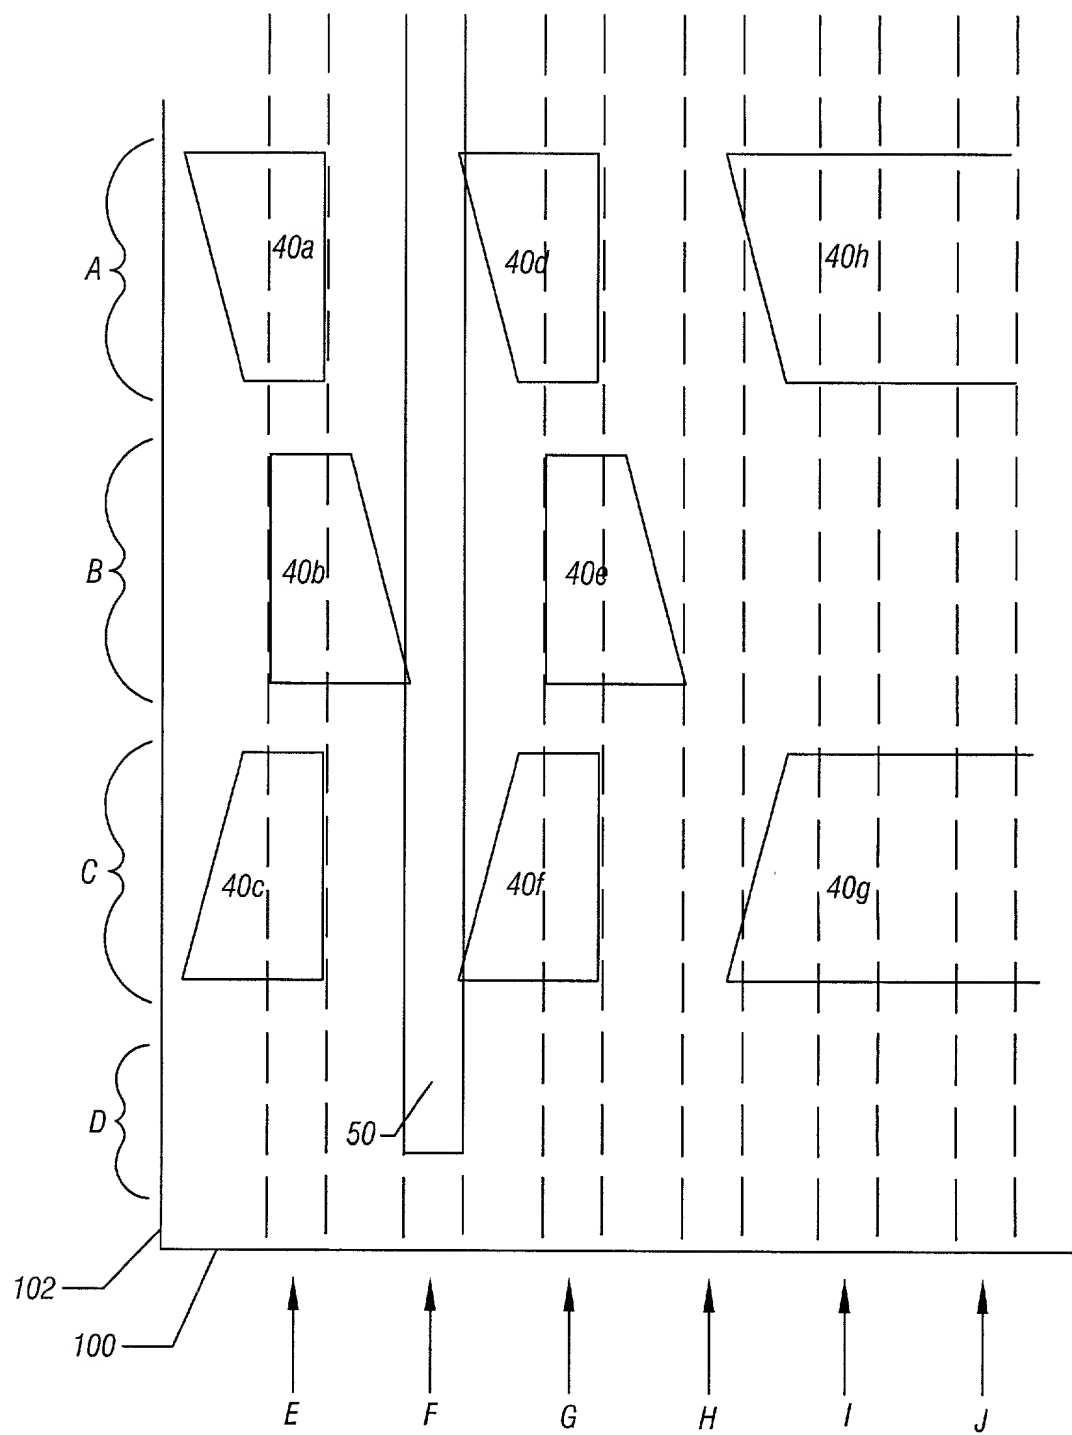

**FIG. 4**